


Anchor Nuts (Imperial)

F2000

Official Distributers of ALCOA products

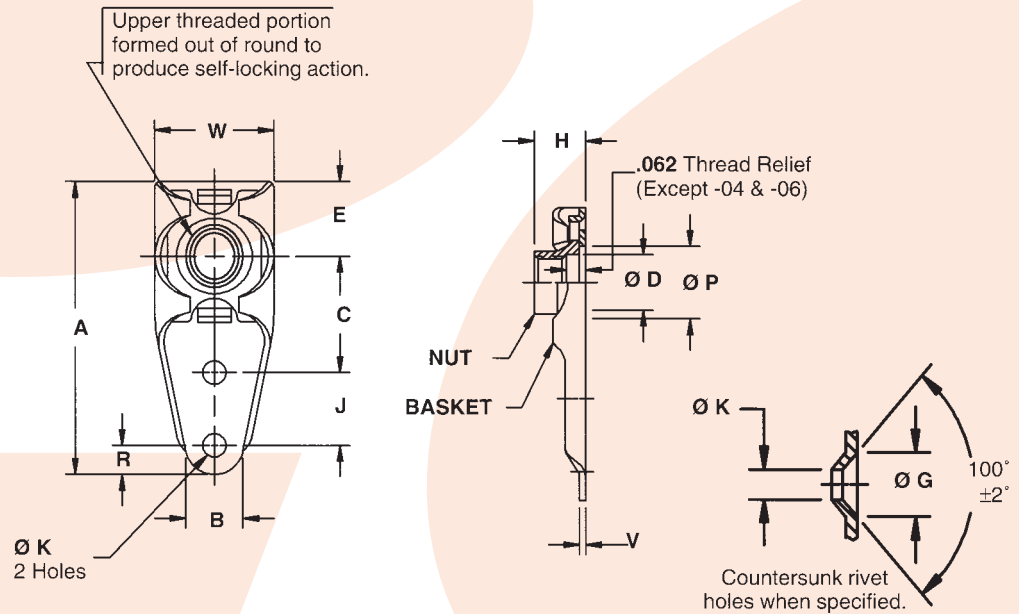

PART NUMBER	THREAD (MIL-S-8879)	A MAX	B REF	C ±.005	D MIN	E REF	G ±.010	H MAX	J ±.002	K +.005 -.000	P REF	R REF	V REF	W MAX	APPROX WT LBS/100
F2000-04	.1120-40 UNJC-3B	1.051	.328	.344	—	.275	.200	.160	.312	.098	.250	.130	.025	.422	.36
F2000-06	.1380-32 UNJC-3B	1.051	.328	.344	—	.275	.200	.175	.312	.098	.250	.130	.025	.422	.38
F2000-08	.1640-32 UNJC-3B	1.051	.328	.344	.168	.275	.200	.250	.312	.098	.250	.130	.025	.422	.50
F2000-3	.1900-32 UNJF-3B	1.051	.328	.344	.194	.275	.200	.250	.312	.098	.250	.130	.025	.422	.50
F2000-4	.2500-28 UNJF-3B	1.306	.359	.500	.254	.364	.200	.281	.312	.098	.312	.130	.025	.531	.82
F2000-5	.3125-24 UNJF-3B	1.396	.391	.500	.317	.440	.230	.328	.312	.130	.375	.141	.025	.531	1.45
F2000-6	.3750-24 UNJF-3B	1.441	.422	.500	.379	.485	.230	.344	.312	.130	.437	.141	.025	.531	1.45

MATERIAL: Carbon steel per AMS 5085 (UNS G10500).

FINISH: Cadmium plate per QQ-P-416, Type II, Class 2 and Kaylube molybdenum disulfide dry film lubricant per MIL-L-46010.

PERFORMANCE: MIL-N-25027.

FLOATABILITY: -06 through -4; .030 minimum radially from center.
-5 up; .025 minimum radially from center.

VARIATIONS: Add "BC" for bottom countersunk rivet holes. Example: F2000-3BC.

F2000

ANCHOR NUT
FLOATING, ONE-LUG

F2000